



**Guascor Energy
Auxiliary Engines
Variable Speed**

1. Power Definition

Guascor Energy diesel engines ratings stated in this document are based on ISO3046-1:2002(E), ISO3046-3:2006(E) and ISO15550:2002(E) standards. These ratings have been measured (including all engine driven mechanical pumps).

Our Guascor Energy diesel engines are designed following the reference conditions. On vessels approved and/or surveyed by IACS members, “standard design conditions” are to be observed.

Standard reference conditions ISO 15550:2002

- Total barometric pressure: 100 kPa / 1.000 mbar
- Air temperature: 25°C (77°F) / 298 K
- Relative humidity: 30%
- Charge air coolant (raw): 25°C (77°F) / 298 K
- Charge air coolant (treated): 29°C (84°F) / 302 K

Standard design conditions ISO 3046-1:2002 & 3046-3:2006

- Total barometric pressure: 100 kPa / 1.000 mbar
- Air temperature: 45°C (113°F) / 318 K
- Relative humidity: 60%
- Charge air coolant (raw): 32°C (89°F) / 305 K
- Charge air coolant (treated): 36°C (96°F) / 309 K

2. Rating Definitions

Auxiliary Engines

A - Rating (unrestricted continuous duty)

Rated power intended for continuous use in applications requiring uninterrupted service with high load factors; this is an ISO standard (continuous) fuel stop power (ICFN)

Typical load factors: 80-100% of rated power
Full load operation time: 100% of time or 24/24h
Operation time: 5.000 - 8.000 h/year
Operation type: Displacement hull vessels for unrestricted use at full speed and load
Typical applications: Fishing trawlers, bottom trawlers, freighters, ankers, tow & push boats, long distance ferries, dredgers, cabin cruiser, research vessels

B - Rating (variable continuous duty)

Rated power intended for use in variable load applications, medium-high load factors; this is an ISO 3046 fuel stop power (IFN)

Typical load factors: 40-80% of rated power
Full load operation time: 80% of time or 10/12h
Operation time: 3.000 - 5.000 h/year
Hull type: Semi-planning or semi-displacement hulls for restricted use at full load
Typical applications: Mid-water trawlers, fishing long liners, purse seiners, harbour tow & push boats, passenger cruiser, tugboats, short distance ferries

C - Rating (intermittent duty)

Power intended for use in variable load applications with moderate load factors. This is an ISO 3046 fuel stop power (IFN)

Typical load factors: 20-80% of rated power
Full load operation time: 50% of time or 6/12h
Operation time: 1.500-3.000 h/year
Hull type: Semi-planning or planning hulls, fast commercial and passenger vessels for restricted use with moderate load factors and high demands on vessel's speed
Typical applications: Passenger boats, high-speed fishing boats, crew and service boats, moto-pumps, pilot boats

3. Fuel Consumption

The fuel consumption values published in this document have been calculated according to ISO8178 standard C1test cycles for auxiliary applications at variable speed. These values must be considered as indicative guidance but not considered absolute values. Fuel consumption may vary as it can be influenced by external factors such as ship application, different environmental conditions, particular propeller design, hull form, etc.

C1 Test Cycle: Auxiliary engines at a variable speed

Mode Number	1	2	3	4	5	6	7	8
% Speed	100%				Intermediate			Idle
% Torque	100	75	50	10	100	75	50	0
Weight Factor	0.15	0.15	0.15	0.1	0.1	0.1	0.1	0.15

Fuel consumption rates are based on ISO3046-1 with a tolerance of +5% and is based on diesel gasoil B with LHV 42.700 KJ/kg (18.358 Btu/lb) when used at 29°C (85°F) and weighing 836 g/liter (6.977 lb/US gal).

4. Emission Certifications

IMO (International Maritime Organization)

On January 1, 2000, annex VI of MARPOL 73 / 78 went into effect for all marine diesel engines above 130 kW / 177 HP installed on vessels whose keel is laid after January 1 and which do not operate exclusively in national waters. Current revision (Tier II) entered into force from January 1, 2011.

The Tier III, in force since January 1, 2016, apply only to the specified ships while operating in Emission Control Areas (ECA) established to limit NOx emissions, outside such areas the Tier II controls apply.

- IMO applies to sea going vessels and on engines rated above 130 kW / 177 mHP.
- Emergency on-board engines are exempt to accomplish IMO regulations.

IMO Tier III includes proprietary SCR Design

CCNR (Central Commission for the Navigation on the Rhine)

Effective January 1, 2003, the CCNR regulates exhaust emissions limits for all marine diesel engines above 37kW / 50HP installed on inland waterway-going vessels running through the Rhine or its tributary rivers. Members of the CCNR include: Belgium, Netherlands, Germany, France, Luxembourg, and Switzerland. Current revision (CCNR II) entered into force effective January 1, 2007.

- CCNR rules apply to inland waterway-going vessels and on engines rated above 37 kW / 50 mHP.
- Equivalent to EU directive for non-road mobile machinery 97/68/ EC, as amended by directive 2004/26/EC, mutual recognition agreement effective July 1, 2007.

5. Marine Classification Societies

Guascor Energy marine engines, gen-sets and gear boxes are designed and built according to the rules of major marine classification societies worldwide. Approvals from major marine classification societies worldwide include:

- **ABS** American Bureau of Shipping
- **BV** Bureau Veritas
- **LR** Lloyds Register

Some marine products or ratings may differ depending upon class society.

For more information on emission or marine classification society certifications, please contact your local Guascor Energy sales representative.

6. Abbreviations

This document contains the following abbreviations which will appear on subsequent pages to identify the emission regulation compliance of each engine type and/or rating.


- IMO II IMO Tier II compliant; EIAPP certificates available.
- IMO III IMO Tier III compliant; EIAPP certificates available.
- CCNR2 CCNR Stage II compliant
- kWb Mechanical kilowatt
- mHP Horse Power

Extensions of this information should be compared with the specifications indicated in the mentioned standards.

All technical information and data within this document is subject to modification without prior notice.

F/SF180 Series

Auxiliary Engines Variable Speed

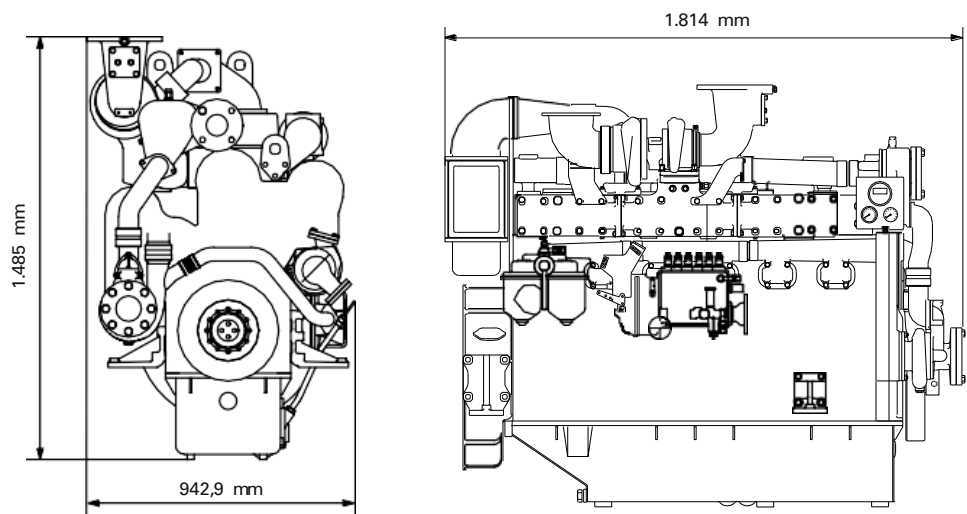

Main data

Cycle (ISO 8178)	C1 (Auxiliary)
Disposition / Displacement	6 L / 17,96 liter
Bore and stroke	152 x 165 mm
Cycle	4-stroke diesel direct injection
Aspiration	Nat. aspirated / turbocharged - aftercooled
Rotation (from flywheel)	Counterclockwise

Auxiliary ratings

Engine Model	Rating	kWb	mHP	RPM	Fuel consumption (ISO 8178)	Emissions
					L/h	
F180	A	184	250	1.800	N.A.	N.C.
SF180TA		434	590	1.800	60,5	IMO II / IMO III
SF180TA		441	600		61,5	
F180	B	191	260	1.800	N.A.	N.C.
F180TA		353	480		49,0	IMO II / IMO III
SF180TA		382	520		53,1	
SF180TA		405	550	1.400		
SF180TA		474	645	1.800	66,2	
F180TA	C	404	549	1.800	56,2	IMO II / IMO III
SF180TA		504	685		70,5	


Weight

Dry weight (kg)	2.620
-----------------	-------

Dimensions and weight may vary depending upon engine configuration.
Data subject to further modifications without prior notice.

F/SF240 Series

Auxiliary Engines Variable Speed

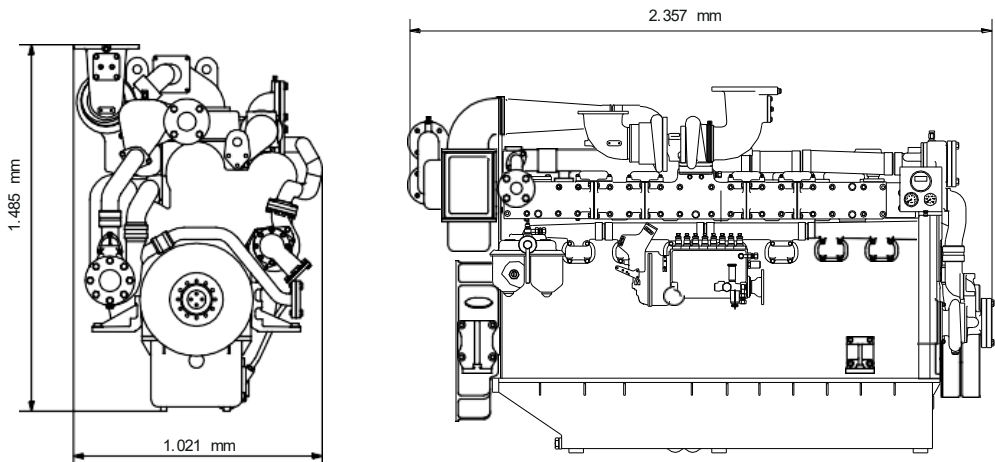

Main data

Cycle (ISO 8178)	C1 (Auxiliary)
Disposition / Displacement	8 L / 23,96 liter
Bore and stroke	152 x 165 mm
Cycle	4-stroke diesel direct injection
Aspiration	Nat. aspirated / turbocharged - aftercooled
Rotation (from flywheel)	Counterclockwise

Auxiliary ratings

Engine Model	Rating	kWb	mHP	RPM	Fuel consumption (ISO 8178)	Emissions
					L/h	
F240TA	A	478	650	1.800	66,9	IMO II / IMO III
		588	800		81,4	IMO II / IMO III
F240TA	B	493	670	1.800	68,9	IMO II / IMO III
SF240TA		635	864		87,5	
SF240TA	C	662	900	1.800	91,0	IMO II / IMO III


Weight

Dry weight (kg)	3.400
-----------------	-------

Dimensions and weight may vary depending upon engine configuration.
Data subject to further modifications without prior notice.

F/SF360 Series

Auxiliary Engines Variable Speed

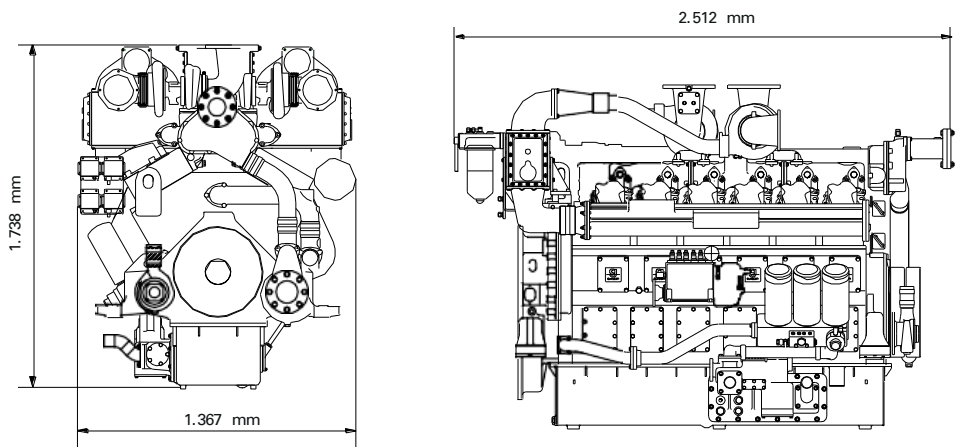

Main data

Cycle (ISO 8178)	C1 (Auxiliary)
Disposition / Displacement	12 V / 35,93 liter
Bore and stroke	152 x 165 mm
Cycle	4-stroke diesel direct injection
Aspiration	Nat. aspirated / turbocharged - aftercooled
Rotation (from flywheel)	Counterclockwise

Auxiliary ratings

Engine Model	Rating	kWb	mHP	RPM	Fuel consumption (ISO 8178)	Emissions
					L/h	
SF360TA	A	882	1.200	1.800	122,9	IMO II / IMOIII
F360TA	B	706	480	1.800	97,9	IMO II / IMO III
SF360TA		949	550	1.800	132,5	
SF360TA	C	1000	1.360	1.800	139,9	IMO II / IMO III


Weight

Dry weight (kg)	4.630
-----------------	-------

Dimensions and weight may vary depending upon engine configuration.
Data subject to further modifications without prior notice.

F/SF480 Series

Auxiliary Engines Variable Speed

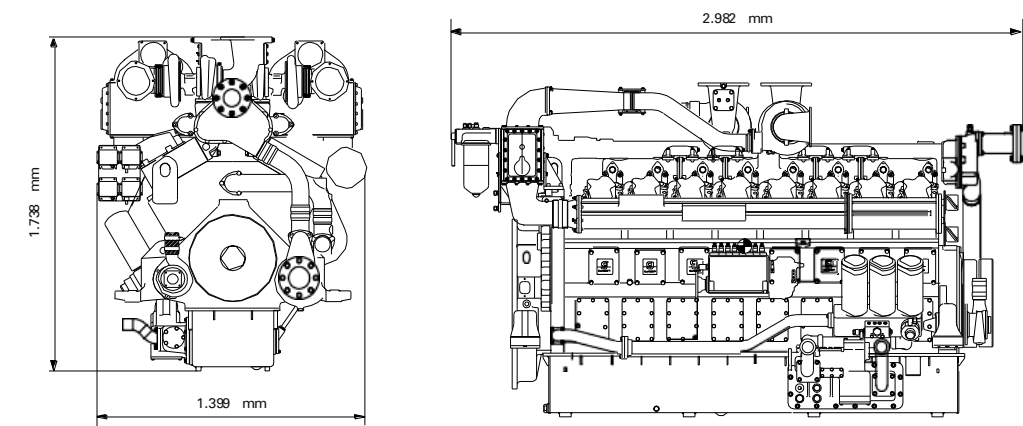

Main data

Cycle (ISO 8178)	C1 (Auxiliary)
Disposition / Displacement	16 V / 47,90 liter
Bore and stroke	152 x 165 mm
Cycle	4-stroke diesel direct injection
Aspiration	Nat. aspirated / turbocharged - aftercooled
Rotation (from flywheel)	Counterclockwise

Auxiliary ratings

Engine Model	Rating	kWb	mHP	RPM	Fuel consumption (ISO 8178)	Emissions
					L/h	
SF480TA	A	1.177	1.600	1.800	163,6	IMO II / IMO III
F480TA	B	993	1.350	1.800	139,2	IMO II / IMO III
SF480TA		1.268	1.724		175,6	
F480TA	C	1.029	1.400	1.800	144,0	IMO II / IMO III
SF480TA		1.324	1.800		182,9	

Weight

Dry weight (kg)	4.630
-----------------	-------

Dimensions and weight may vary depending upon engine configuration.
 Data subject to further modifications without prior notice.

Published by Guascor Energy

Oikia, 44
20759 Zumaia (Gipuzkoa) Spain PO Box 30
Tel: (Int'l +34) 943 86 52 00
Fax: (Int'l +34) 943 86 52 10

www.guascor-energy.com

Subject to changes and errors. The information given in this document only contains general descriptions and/or performance features which may not always specifically reflect those described, or which may undergo modification in the course of further development of the products. The requested performance features are binding only when they are expressly agreed upon in the concluded contract.

© Guascor Energy 2025

Guascor Energy is a trademark licensed by Guascor Energy S.A.U

